TECHNICAL DATA SHEET

Queensland Gaskets

EVA30 | EVA CLOSED CELL FOAM SHEET

Sheet Dimension: 1000mm x 2000mm
Thickness: 3mm to 100mm

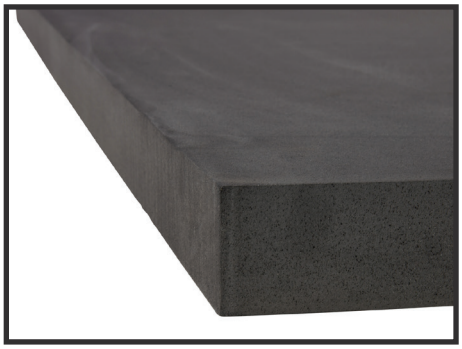

TYPICAL PHYSICAL PROPERTIES

Hardness	(°) Shore C	15 - 20
	Kpa	28
	Shore OO	-
Elongation Ration (%)		200
Tensile Strength (Mpa)		0.27
Tear Strength (kg/cm)		1.0
Compression Strength 25% (Mpa)		0.03
Compression Deflection (Mpa)		0.10
Compression Set 25% 72h 23°C (%)		6
Density (kg/m³)		30-45 ±3
Thermal Conductivity (w/m.k)		0.035
Water Absorption (g/cm³)		0.02
Linear Shrinkage (%)		±8
Operating Temperature		-30° to +80°
Flammability (mm/60 seconds) UL94 HF-1 (Test method UL94-1997 – Horizontal Burning Foamed Material Test)		47mm FMVSS302
Standard Colour		White, Black

Contact us to discuss requirements and place your order **07 3277 3922**

All information and data quoted has been provided by our suppliers and is based upon years of experience in the production and operation of sealing elements. This data may not be used to support any warranty claims. With its publication this latest edition supersedes all previous issues and is subject to change without further notice.